




Water Grade Polypropylene Meltblown Cartridge - GWTB

- Unique & proprietary process delivers superior efficiency, life and economy
- Excellent compatibility with a wide range of chemicals
- Graded density pore structure enhances dirt holding capacity
- Easy cartridge incineration and disposal
- All polypropylene construction
- All end configurations available (glued or thermally-bonded)



Flow Rate vs Pressure Drop

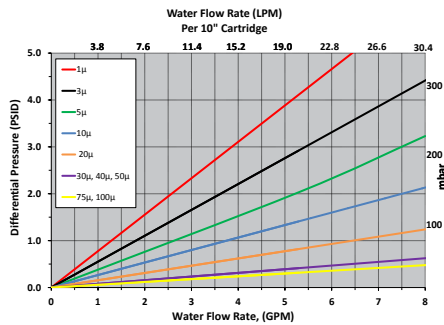

Performance Specifications

Micron Ratings:

1, 3, 5, 10, 20, 30, 50, 75, 100

Efficiencies:

Water Grade = 80%

Construction Materials

Filtration Media Polypropylene
End Caps Polypropylene
O-Rings/Gaskets Silicone, Buna, Polyfoam, EPDM, Viton®

Food Safety Compliance

Materials of construction comply with FDA regulations for food and beverage contact use as detailed in the US Code of Federal Regulations, 21CFR. Materials used to produce filter media and hardware are deemed safe for use in contact with foodstuffs in accordance with EU Directives 2002/72/EC, 1935/2004, and/or 10/2011.

Maximum Recommended

Operating Conditions

Forward 35 PSID
Reverse 25 PSID
Change Out Differential Pressure 20 PSID
Temperature 140°F (60°C)

Dimensions (Nominal)

Length 9.75 to 40 inches (24.8 to 102 cm)
Outside Diameter 2.5 inches (6.4 cm)
Inside Diameter 1 inch (2.6 cm)

Purity

GWTB series filter cartridges are free of additives, wetting agents, binders and silicone.

Ordering Information

GWTB	Rating (μ)	A	Length	-	End Cap Style	O-Rings/Gaskets	-	End Caps
Water Grade	1	A = 2.5" OD	9.75" (24.76cm)		2 = DOE Flat Gasket	B = Buna		Blank = Glued
	3		9.875" (25.08 cm)		3 = 222 w/Fin	E = EPDM		TB = Thermally-Bonded
	5		10" (25.4 cm)		4 = 222 w/Flat Cap	S = Silicone		CS = 316ss Compression Spring (TB ONLY)
	10		19.5" (49.53 cm)		5 = 222 w/Spring	V = Viton®		PC = Polypropylene core
	20		20" (50.8 cm)		6 = 226 w/Flat Cap	P = Polyfoam (Gaskets)		
	30		29.25" (74.29 cm)		7 = 226 w/Fin			
	50		29.5" (74.93 cm)		8 = 226 w/Spring			
	75		30" (76.2 cm)		9 = SOE w/ Spring			
	100		39" (99.1 cm)		10 = DOE w/Core Extender			
			40" (101.6 cm)		20 = SOE PP Ext. w/Spring			

DISCLAIMER: Filtration data presented is representative of performance observed in controlled laboratory testing. It is not given as a warranty, specification or statement of fitness for use. Specific performance can vary widely depending on contaminant type, fluid properties, flow rates and environmental conditions. It is recommended that users conduct thorough qualification testing to assure the product functions as required.